

OPTIMUM DESIGN OF SPACE FRAMES UNDER SEISMIC LOADING

MANOLIS PAPADRAKAKIS, NIKOS D. LAGAROS and VAGELIS PLEVRIIS

*Institute of Structural Analysis & Seismic Research,
National Technical University Athens,
Zografou Campus, Athens 15773, Greece
E-mail: {mpapadra, nlagaros, vplevris}@central.ntua.gr*

Received 6 October 2000

Accepted Revised Version 14 November 2000

The objective of this paper is to perform structural optimization under seismic loading. Combinatorial optimization methods and in particular algorithms based on Evolution Strategies are implemented for the solution of large-scale structural optimization problems under seismic loading. In this work the efficiency of a rigorous approach in treating dynamic loading is investigated and compared with a simplified dynamic analysis in the framework of finding the optimum design of structures with minimum weight. In this context a number of accelerograms are produced from the elastic design response spectrum of the region. These accelerograms constitute the multiple loading conditions under which the structures are optimally designed. This approach is compared with an approximate design approach based on simplifications adopted by the seismic codes. The results obtained for a characteristic test problem indicate a substantial improvement in the final design when the proposed optimization procedure is implemented.

Keywords: Structural optimization; evolution strategies, seismic loading.

1. Introduction

Optimization of large-scale structures, such as sizing optimization of multi-storey 3D frames is a computationally intensive task. The optimization problem becomes more intensive when dynamic loading is involved. In sizing optimization the aim is to minimize the weight of the structure under certain restrictions imposed by design codes. When a gradient-based optimizer is used the most time-consuming part of the optimization process is devoted to the sensitivity analysis phase, which is an important ingredient of all mathematical programming optimization methods.¹ On the other hand the application of combinatorial optimization methods based on probabilistic searching, such as evolution strategies, do not need gradient information and therefore avoid performing the computationally expensive sensitivity analysis step.² Furthermore, it is widely recognized that combinatorial optimization techniques are in general more robust and present a better global behavior than mathematical programming methods. They may suffer, however, from a slow rate of convergence towards the global optimum. Moreover, the feasible design space

in structural optimization problems under dynamic constraints is often disconnected or disjoint^{3,4} which causes difficulties for many conventional optimization methods.

During the last fifteen years there has been a growing interest in problem solving systems based on algorithms, which rely on analogies to natural processes. The best-known algorithms in this class are the genetic algorithms (GAs)^{5,6} and the evolution strategies (ESs).^{7,8} Evolution-based algorithms maintain a population of potential solutions. These algorithms have some selection process based on fitness of individuals and some recombination operators. Both GAs and ESs imitate biological evolution in nature and combine the concept of artificial survival of the fittest with evolutionary operators to form a robust search mechanism.

Due to the uncertain nature of the earthquake loading, structural designs are often based on design response spectra of the region and on some simplified assumptions of the structural behavior under earthquake. In the case of a direct consideration of the earthquake loading the optimization of structural systems requires the solution of the dynamic equations of motion which can be orders of magnitude more computational intensive than the case of static loading. In this work, both the rigorous approach and the simplified one with respect to the loading condition are implemented and their efficiency is compared in the framework of finding the optimum design of a structure having the minimum weight. In the context of the rigorous approach a number of artificial accelerograms are produced from the design response spectrum of the region for elastic structural response, which constitutes the multiple loading conditions under which the structures is optimally designed. The elastic design response spectrum can be seen as an envelope of response spectra, for a specific damping ratio, of different earthquakes most likely to occur in the region. This approach is compared with the approximate one based on simplifications adopted by the seismic codes. The results obtained for a characteristic test problem indicate a substantial improvement in the final design when the rigorous approach is considered.

2. Formulation of the Optimization Problem

In sizing optimization problems the aim is usually to minimize the weight of the structure under certain behavioral constraints on stress and displacements. The design variables are most frequently chosen to be dimensions of the cross-sectional areas of the members of the structure. Due to engineering practice demands the members are divided into groups having the same design variables. This linking of elements results in a trade-off between the use of more material and the need of symmetry and uniformity of structures due to practical considerations. Furthermore, it has to be taken into account that due to fabrication limitations the design variables are not continuous but discrete since cross-sections belong to a certain set. A discrete structural optimization problem can be formulated in the

following form

$$\begin{aligned} \min \quad & F(s) \\ \text{subject to} \quad & g_j(s) \leq 0, \quad j = 1, \dots, m \\ & s_j \in R^d, \quad i = 1, \dots, n \end{aligned} \quad (1)$$

where R^d is a given set of discrete values and the design variables $s_i (i = 1, \dots, n)$ can take values only from this set. In the present study the sizing optimization of multi-storey 3D frames is investigated.

Optimal designs of frames have been studied initially using conventional plastic design methods under certain simplified assumptions. Then more sophisticated optimization algorithms were introduced in order to solve this type of problems more efficiently.^{9,10} Most frequently the objective function is the weight of the structure and the constraints are the member stresses and nodal displacements or inter-storey drifts. For rigid frames with rolled I -shapes, the stress constraints, under allowable stress design requirements specified by Eurocode 3,¹¹ are expressed by the non-dimensional ratio q of the following formulas

$$q = \frac{f_a}{F_a} + \frac{f_b^y}{F_b^y} + \frac{f_b^z}{F_b^z} \leq 1.0 \quad \text{if } \frac{f_a}{F_a} \leq 0.15 \quad (2)$$

and

$$q = \frac{f_a}{0.60 \cdot \sigma_y} + \frac{f_b^y}{F_b^y} + \frac{f_b^z}{F_b^z} \leq 1.0 \quad \text{if } \frac{f_a}{F_a} > 0.15 \quad (3)$$

where f_a is the computed compressive axial stress, f_b^y and f_b^z are the computed bending stresses for y and z axis, respectively. F_a is the allowable compressive axial stress, F_b^y , F_b^z are the allowable bending stresses for y and z axis, respectively, and σ_y is the yield stress of the steel. The allowable inter-storey drift is limited to 1.5% of the height of each storey.

3. Structural Design under Seismic Loading

The equations of equilibrium for a finite element system in motion can be written in the usual form

$$M(s_i)\ddot{u}_t + C(s_i)\dot{u}_t + K(s_i)u_t = R_t \quad (4)$$

where $M(s_i)$, $C(s_i)$, and $K(s_i)$ are the mass, damping and stiffness matrices for the i th design vector s_i ; R_t is the external load vector, while u , $\dot{u}$ and $\ddot{u}$ are the displacement, velocity, and acceleration vectors of the finite element assemblage, respectively. The solution methods of direct integration of equations of motion and of response spectrum modal analysis, which is based on the mode superposition approach, will be considered in the following sections.

3.1. Direct time integration approach — The Newmark method

The Newmark integration scheme is adopted in the present study to perform the direct time integration of the equations of motion. Under this scheme the variation of velocity and displacement are given by

$$\dot{u}_{t+\Delta t} = \dot{u}_t + [(1 - \delta)\ddot{u}_t + \delta\ddot{u}_{t+\Delta t}]\Delta t \quad (5)$$

$$u_{t+\Delta t} = u_t + \dot{u}_t\Delta t + [(1/2 - \alpha)\ddot{u}_t + \alpha\ddot{u}_{t+\Delta t}]\Delta t^2 \quad (6)$$

where α and δ are parameters that can be determined to obtain integration accuracy and stability. When $\delta = 1/2$ and $\alpha = 1/6$, relations (5) and (6) correspond to the linear acceleration method. In addition to (5) and (6), for finding the displacements, velocities, and accelerations at time $t + \Delta t$, the equilibrium Eqs. (4) at time $t + \Delta t$ are also considered

$$M(s_i)\ddot{u}_{t+\Delta t} + C(s_i)\dot{u}_{t+\Delta t} + K(s_i)u_{t+\Delta t} = R_{t+\Delta t}. \quad (7)$$

Solving from (5) for $\ddot{u}_{t+\Delta t}$ in terms of $u_{t+\Delta t}$ and then substituting for $\dot{u}_{t+\Delta t}$ into (5), we obtain equations for $\ddot{u}_{t+\Delta t}$ and $\dot{u}_{t+\Delta t}$ each in terms of the unknown displacements $u_{t+\Delta t}$ only. These two relations for $\ddot{u}_{t+\Delta t}$ and $\dot{u}_{t+\Delta t}$ are substituted into Eq. (7) to solve for $u_{t+\Delta t}$ after using (5) and (6), $\ddot{u}_{t+\Delta t}$ and $\dot{u}_{t+\Delta t}$ can be also be calculated. As a result of this substitution the following well-known equilibrium equation is obtained at each Δt

$$K_{\text{eff}}(s_i)u_{t+\Delta t} = R_{t+\Delta t}^{\text{eff}} \quad (8)$$

where

$$K_{\text{eff},i} = K_i + \alpha_0 M_i + \alpha_1 C_i$$

$$R_{t+\Delta t}^{\text{eff}} = R_{t+\Delta t} + M_i(\alpha_0 u_t + \alpha_2 \dot{u}_t + \alpha_3 \ddot{u}_t) + C_i(\alpha_1 u_t + \alpha_4 \dot{u}_t + \alpha_5 \ddot{u}_t)$$

with $\delta \geq 0.50$; $\delta \geq 0.25(0.5 + \delta)^2$,

$$\alpha_0 = \frac{1}{\alpha\Delta t^2}, \quad \alpha_1 = \frac{\delta}{\alpha\Delta t}, \quad \alpha_2 = \frac{1}{\alpha\Delta t}, \quad \alpha_3 = \frac{1}{2\alpha} - 1, \quad \alpha_4 = \frac{\delta}{\alpha} - 1,$$

$$\alpha_5 = \frac{\Delta t}{2} \left(\frac{\delta}{\alpha} - 2 \right), \quad \alpha_6 = \Delta t(1 - \delta), \quad \alpha_7 = \delta\Delta t.$$

3.2. Creation of artificial accelerograms

The selection of the proper external loading R_t for design purposes is not an easy task due to the uncertainties involved in the seismic loading. For this reason a rigorous treatment of the seismic loading is to assume that the structure is subjected to a set of earthquakes that are more likely to occur in the region where the structure is located.

The seismic excitations that are more likely to occur are produced as a series of artificial accelerograms. In order these artificial accelerograms, that will load the structure, to be representative they have to match some requirements of the

seismic codes. The most demanding one is that the accelerograms have to be compatible with the elastic design response spectrum of the region where the structure is located. It is well known that each accelerogram corresponds to a single response spectrum for a given damping ratio that can be defined relatively easy. On the other hand on each response spectrum corresponds an infinite number of accelerograms.

Gasparini and Vanmarke^{12,13} originally proposed the creation of artificial accelerograms that correspond to a specific response spectrum. In this work the implementation published by Taylor¹⁴ for the generation of statistically independent artificial acceleration time histories is adopted. This method is based on the fact that any periodic function can be expanded into a series of sinusoidal waves

$$x(t) = \sum_k A_k \sin(\omega_k t + \varphi_k) \quad (9)$$

where A_k is the amplitude, ω_k is the cyclic frequency and φ_k is the phase angle of the k th contributing sinusoid. By fixing an array of amplitudes and then generating different arrays of phase angles, different motions can be generated which are similar in general appearance but different in the “details”. The computer uses a random number generator subroutine to produce strings of phase angles with a uniform distribution in the range between 0 and 2π . The amplitudes A_k are related to the spectral density function in the following way

$$G(\omega_k)\Delta\omega = \frac{A_k^2}{2} \quad (10)$$

where $G(\omega_k)\Delta\omega$ may be interpreted as the contribution to the total power of the motion from the sinusoid with frequency ω_k . The power of the motion produced by Eq. (9) does not vary with time. To simulate the transient character of real earthquakes, the steady-state motion are multiplied by a deterministic envelope function $I(t)$

$$Z(t) = I(t) \sum_k A_k \sin(\omega_k t + \varphi_k). \quad (11)$$

The resulting motion is stationary in frequency content with peak acceleration close to the target peak acceleration. In this study a trapezoidal intensity envelope function is adopted. The generated peak acceleration is artificially modified to match the target peak acceleration, which corresponds to the chosen elastic design response spectrum. An iterative procedure is implemented to smooth the calculated spectrum and improve the matching.¹⁴

The elastic design response spectrum considered in the current study is depicted in Fig. 1 for damping ratio $\xi = 2.5\%$. Five artificial uncorrelated accelerograms, produced by the previously discussed procedure and shown in Fig. 2, have been used as the input seismic excitation for the numerical tests. The corresponding response spectrum of the first artificial accelerogram is also depicted in Fig. 1.

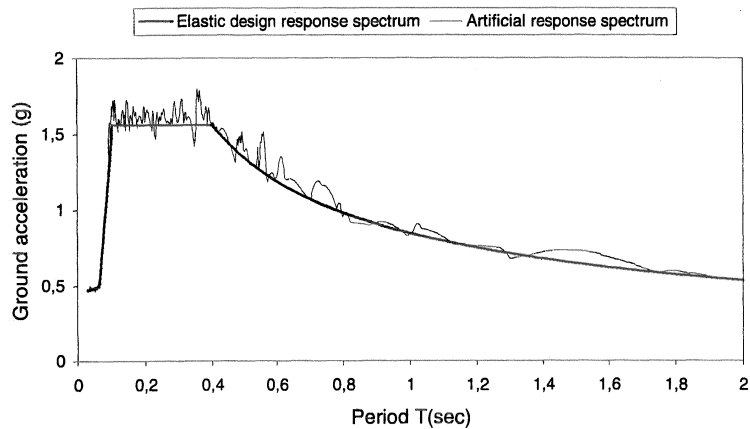


Fig. 1. Elastic design response spectrum of the region and response spectrum of the first artificial accelerogram ($\xi = 2.5\%$).




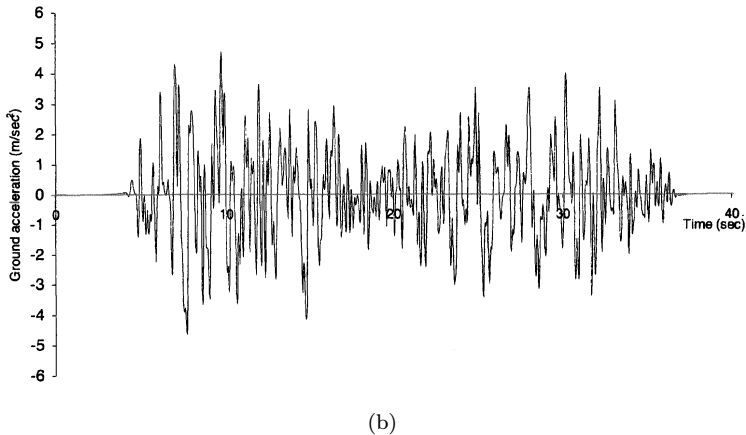



Fig. 2. The five artificial accelerograms.

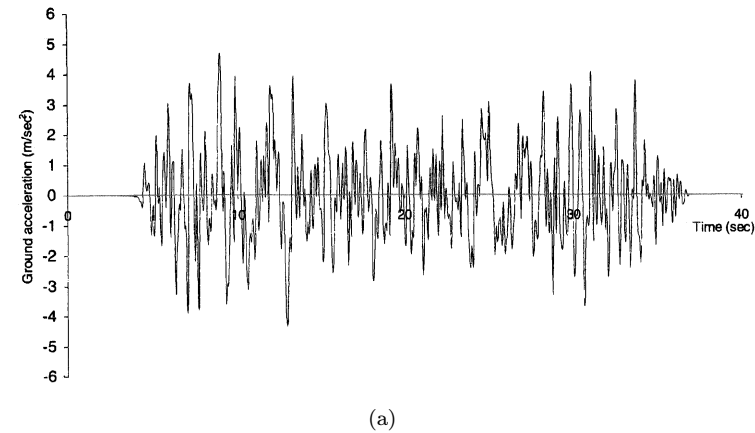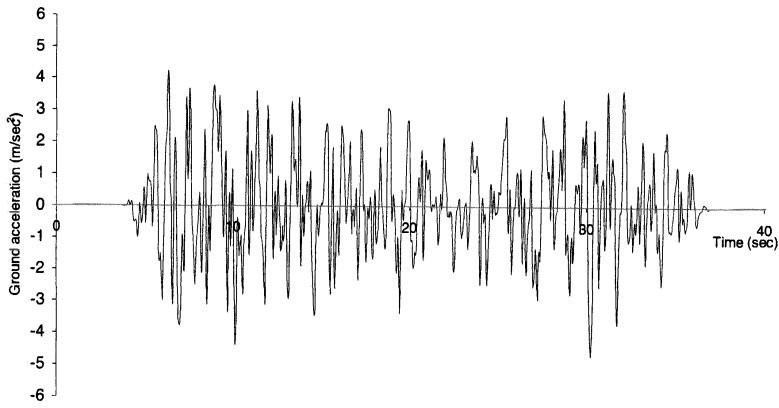

(c)

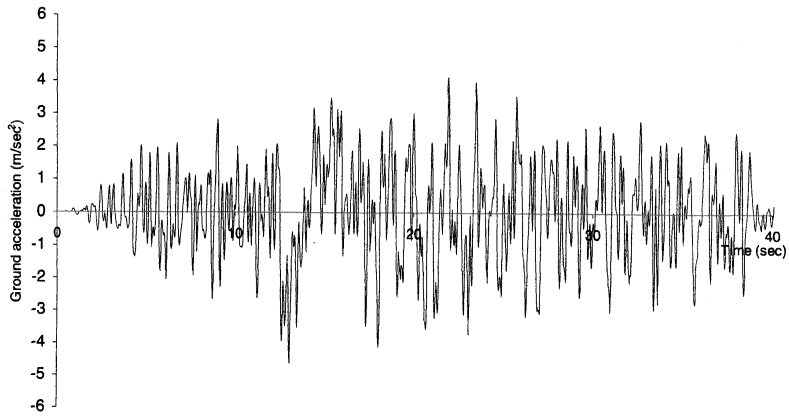

(d)

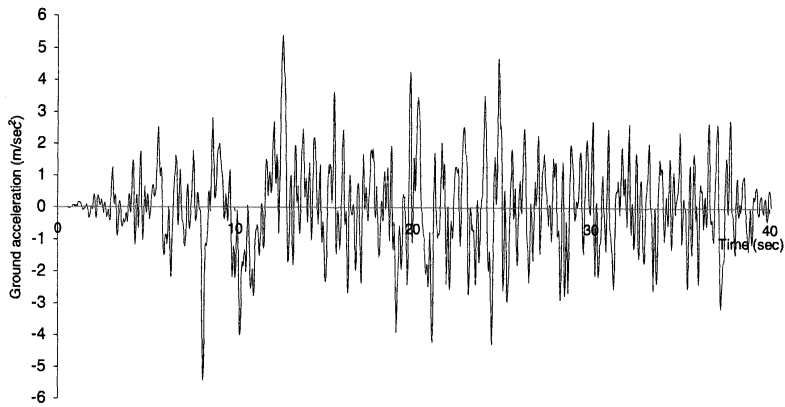

(e)

Fig. 2. (Continued)

3.3. Response spectrum modal analysis

The response spectrum modal analysis is based on a simplification of the mode superposition approach with the aim to avoid time history analyses which are required by both, the direct integration and mode superposition approaches. In the case of the response spectrum modal analysis, Eq. (4) is modified according to the modal superposition approach in the following form

$$\bar{M}(s_i)\ddot{u}_t + \bar{C}(s_i)\dot{u}_t + \bar{K}(s_i)u_t = \bar{R}_t \quad (12)$$

where

$$\bar{M}_i = \Phi_i^T M_i \Phi_i \quad (13)$$

$$\bar{C}_i = \Phi_i^T C_i \Phi_i \quad (14)$$

$$\bar{K}_i = \Phi_i^T K_i \Phi_i \quad (15)$$

$$\bar{R}_t = \Phi_i^T R_t \quad (16)$$

are the generalized values of the corresponding matrices and the loading vector, while Φ_i is an eigenmode shape matrix to be defined later. For simplicity $M(s_i)$, $C(s_i)$, $K(s_i)$ are denoted by M_i , C_i , K_i , respectively. These matrices correspond to the design, which is defined by the i th vector of the design parameters, also called design vector. According to the modal superposition approach the system of N simultaneous differential equations, which are coupled with the off-diagonal terms in the mass, damping and stiffness matrices, is transformed to a set of N independent normal-coordinate equations. The dynamic response can therefore be obtained by solving separately for the response of each normal (modal) coordinate and then superimposing these to obtain the response in the original coordinates.

In the response spectrum modal analysis a number of different formulas have been proposed to obtain reasonable estimates of the maximum response based on the spectral values without performing time history analyses for a considerable number of transformed dynamic equations. The simplest and most popular of these is the square root of the sum of the squares (SRSS) of the modal responses. According to this estimate the maximum total displacement is approximated by

$$u_{\max} = \sqrt{u_{1,\max}^2 + u_{2,\max}^2 + \cdots + u_{N,\max}^2} \quad (17)$$

where $u_{j,\max}$ corresponds to the maximum displacement calculated from the j th transformed dynamic equations over the complete time period. The use of the Eq. (17) permits this type of “dynamic” analysis by knowing only the maximum modal coordinates $u_{j,\max}$.

The following steps summarize the response spectrum modal analysis adopted in this study and by a number of seismic codes around the world:

- (1) Calculate a number $m' < N$ of eigenfrequencies and the corresponding eigenmode shape matrices, which are classified in the following order

$(\omega_i^1, \omega_i^2, \dots, \omega_i^{m'})$, $\Phi_i = [\phi_i^1, \phi_i^2, \dots, \phi_i^{m'}]$, respectively, where ω_i^j , ϕ_i^j are the j th eigenfrequency-eigenmode corresponding to the i th design vector. m' is a user specified number, based on experience or on previous test analyses, which has to satisfy the requirement of step 6.

- (2) Calculate the generalized masses, according to the following equation

$$\bar{m}_i^j = \phi_i^{jT} M_i \phi_i^j. \quad (18)$$

- (3) Calculate the coefficients L_i^j , according to the following equation

$$L_i^j = \phi_i^{jT} M_i r \quad (19)$$

where r is the influence vector, which represents the displacements of the masses resulting from static application of a unit, ground displacement.

- (4) Calculate the modal participation factor Γ_i^j , according to the following equation

$$\Gamma_i^j = \frac{L_i^j}{\bar{m}_i^j}. \quad (20)$$

- (5) Calculate the effective modal mass for each design vector and for each eigenmode, by the following equation

$$m_{\text{eff},i}^j = \frac{L_i^{j2}}{\bar{m}_i^j}. \quad (21)$$

- (6) Calculate a number $m < m'$ of the important eigenmodes. According to the Eurocode, the minimum number of the eigenmodes that has to be taken into consideration is defined by the following assumption: the sum of the effective eigenmasses must not be less than the 90% of the total vibrating mass m_{tot} of the system, so the first m eigenmodes that satisfy the equation

$$\sum_{j=1}^m m_{\text{eff},i}^j \geq 0.90 m_{\text{tot}} \quad (22)$$

are taken into consideration.

- (7) Calculate the values of the spectral acceleration $R_d(T_j)$ that correspond to each eigenperiod T_j of the important modes.
 (8) Calculate the modal displacements according to equation

$$(\text{SD})_j = \frac{R_d(T_j)}{\omega_j^2} = \frac{R_d(T_j) \cdot T_j^2}{4\pi^2}. \quad (23)$$

- (9) Calculate the modal displacements

$$u_{j,\text{max}} = \Gamma_i^j \cdot \phi_i^j \cdot (\text{SD})_j. \quad (24)$$

- (10) The total maximum displacement is calculated by superimposing the maximum modal displacements according to Eq. (17).

4. Solution of the Optimization Problem

There are basically two types of algorithms belonging to the class of evolutionary computation that imitate nature by using biological methodologies in order to find the optimum solution of a problem: (i) evolution strategies (ESs) and (ii) genetic algorithms (GAs). Their main difference is that GAs deal with bit-strings of fixed sizes and ESs with real vectors. GAs basic assumption is that the optimal solution can be found by assembling building blocks, i.e. partial pieces of solutions, while ESs and EP simply ensure the emergence of the best solutions. The most important consequence of this different approach is related to the recombination operator, viewed as essential for GAs and as potentially useful for ESs. The modern tendency seems to follow combinations of the two approaches, since GAs users have turned to real number representations when dealing with real numbers following experimental results or heuristic demonstrations, whereas ESs users have included recombination as a standard operator and have designed special operators for non-real-valued problems.¹⁵ ESs, appear to be more robust and are likely to achieve a high rate of convergence than GAs, due to their self-adaptation search mechanism, in solving real world problems.¹⁶

Evolution strategies were proposed for parameter optimization problems in the seventies by Rechenberg⁷ and Schwefel.⁸ Similar to genetic algorithms, ESs imitate biological evolution in nature and have three characteristics that make them different from other conventional optimization algorithms: (i) in place of the usual deterministic operators, they use randomized operators: mutation, selection as well as recombination; (ii) instead of a single design point, they work simultaneously with a population of design points in the space of variables; (iii) they can handle continuous, discrete and mixed optimization problems. The second characteristic allows for a natural implementation of ESs on parallel computing environments. The ESs was initially applied for continuous optimization problems, but recently they have also been implemented in discrete and mixed optimization problems.

4.1. *ESs for discrete optimization problems*

In engineering practice the design variables are not continuous because usually the structural parts are constructed with certain variation of their dimensions. Thus design variables can only take values from a predefined discrete set. For the solution of discrete optimization problems Thierauf and Cai¹⁷ have proposed a modified ESs algorithm. The basic differences between discrete and continuous ESs are focused on the mutation and the recombination operators. The multi membered ESs (M-ESs) adopted in the current study uses three operators: recombination, mutation and selection operators that can be included in the algorithm as follows:

4.1.1. *Step 1 (recombination and mutation)*

The population of μ parents at g th generation produces λ offsprings. The genotype of any descendant differs only slightly from that of its parents. For every offspring

vector a temporary parent vector $\tilde{s} = [\tilde{s}_1, \tilde{s}_2, \dots, \tilde{s}_n]^T$ is first built by means of recombination. For discrete problems the following recombination cases can be used

$$\tilde{s}_i = \begin{cases} s_{\alpha,i} \text{ or } s_{b,i} \text{ randomly} & \text{(A)} \\ s_{m,i} \text{ or } s_{b,i} \text{ randomly} & \text{(B)} \\ s_{bj,i} & \text{(C)} \\ s_{\alpha,i} \text{ or } s_{bj,i} \text{ randomly} & \text{(D)} \\ s_{m,i} \text{ or } s_{bj,i} \text{ randomly} & \text{(E)} \end{cases} \quad (25)$$

$\tilde{s}_i$ is the i th component of the temporary parent vector $\tilde{s}$, $s_{\alpha,i}$ and $s_{b,i}$ are the i th components of the vectors s_a and s_b which are two parent vectors randomly chosen from the population. The vector s_m is not randomly chosen but is the best of the μ parent vectors in the current generation. In case (C) of Eq. (25), $\tilde{s}_i = s_{bj,i}$ means that the i th component of $\tilde{s}$ is chosen randomly from the i th components of all μ parent vectors. From the temporary parent $\tilde{s}$ an offspring can be created following the mutation operator.

Let us consider the temporary parent $s_p^{(g)}$ of the generation g that produces an offspring $s_o^{(g)}$ through the mutation operator as follows

$$s_o^{(g)} = s_p^{(g)} + z^{(g)} \quad (26)$$

where $z^{(g)} = [z_1^{(g)}, z_2^{(g)}, \dots, z_n^{(g)}]^T$ is a random vector. Mutation is understood to be random, purposeless events, which occurs very rarely. If one interprets them, as a set of many individual events the “natural” choice is to use a probability distribution according to which small changes occur frequently, but large ones only rarely. As a result of this assumption two requirements arise together by analogy with natural evolution: (i) the expected mean value ξ_i for a component $z_i^{(g)}$ to be zero; (ii) the variance σ_i^2 , the average squared standard deviation from mean value, to be small. The mutation operator in the continuous version of ESs produces a normally distributed random change vector $z^{(g)}$. Each component of this vector has small standard deviation value σ_i and zero mean value. As a result of this there is a possibility that all components of a parent vector may be changed, but usually the changes are small. In the discrete version of ESs the random vector $z^{(g)}$ is properly generated in order to force the offspring vector to move to another set of discrete values. The fact that the difference between any two adjacent values can be relatively large is against the requirement that the variance σ_i^2 should be small. For this reason it is suggested¹⁷ that not all the components of a parent vector, but only a few of them (e.g. ℓ), should be randomly changed in every generation. This means that $n - \ell$ components of the randomly changed vector $z^{(g)}$ will have zero value. In other words, the terms of vector $z^{(g)}$ are derived from

$$z_i^{(g)} = \begin{cases} (\kappa + 1)\delta s_i & \text{for } \ell \text{ randomly chosen components} \\ 0 & \text{for } n - \ell \text{ other components} \end{cases} \quad (27)$$

where δs_i is the difference between two adjacent values in the discrete set and κ is a random integer number, which follows the Poisson distribution

$$p(\kappa) = \frac{(\gamma)^\kappa}{\gamma!} e^{-\gamma} \quad (28)$$

γ is the standard deviation as well as the mean value of the random number κ . For a very small γ (e.g. 0.001) the probability that κ will be zero is greater than 99%. For greater values of γ (e.g. 0.05) the probability that κ will be zero is 95% and the probability that it will be one is 5%. This shows how the random change $z_i^{(g)}$ is controlled by the parameter γ . The choice of ℓ depends on the size of the problem and it is usually taken as the 1/5 of the total number of design variables. The ℓ components are selected using uniform random distribution in every generation according to Eq. (27).

4.1.2. Step 2 (selection)

There are two different types of the multi-membered ESs:

- $(\mu + \lambda)$ -ESs: The best μ individuals are selected from a temporary population of $(\mu + \lambda)$ individuals to form the parents of the next generation.
- (μ, λ) -ESs: The μ individuals produce λ offsprings ($\mu \leq \lambda$) and the selection process defines a new population of μ individuals from the set of λ offsprings only.

For discrete optimization the procedure terminates when one of the following termination criteria is satisfied: (i) when the best value of the objective function in the last $4n\mu/\lambda$ generations remains unchanged, (ii) when the mean value of the objective values from all parent vectors in the last $2n\mu/\lambda$ generations has not been improved by less than a given value $\varepsilon_b (= 0.0001)$, (iii) when the relative difference between the best objective function value and the mean value of the objective function values from all parent vectors in the current generation is less than a given value $\varepsilon_c (= 0.0001)$, (iv) when the ratio μ_b/μ has reached a given value $\varepsilon_d (= 0.5$ to $0.8)$ where μ_b is the number of the parent vectors in the current generation with the best objective function value.

4.2. ESs in structural optimization problems

So far comparatively little effort has been spent in applying probabilistic search methods to structural optimization problems.^{2,18} Usually this type of problems are solved with a mathematical programming algorithm such as the sequential quadratic programming method (SQP),^{1,19,20} the generalized reduced gradient method (GrG),²¹ the method of moving asymptotes (MMA),²² which need gradient information. In structural optimization problems, where the objective function and the constraints are particularly highly non-linear functions of the design variables,

the computational effort spent in gradient calculations is usually large. Little effort has been also spent in examining structural optimization problems for dynamic loading and especially under earthquake loading within a certain seismic code.²³

In a recent work by Papadrakakis *et al.*² it was found that combinatorial type algorithms are computationally efficient even if larger number of analyses is needed to reach the optimum. These analyses are in most cases computationally less expensive than mathematical programming algorithms since they do not need gradient information and exhibit satisfactory convergence characteristics. Furthermore, probabilistic methodologies, due to their random search, are considered to have a better behaviour in optimization problems with local optima since they are more capable of finding the global optimum, whereas mathematical programming algorithms may be trapped in local optima. Finally, the natural parallelism inherent in combinatorial algorithms makes them very attractive for application in parallel computer architectures.

The ESs optimization procedure starts with a set of parent vectors. If any of these parent vectors gives an infeasible design then this parent vector is modified until it becomes feasible. Subsequently, the offsprings are generated and checked if they are in the feasible region. According to $(\mu + \lambda)$ selection scheme in every generation the values of the objective function of the parent and the offspring vectors are compared and the worst vectors are rejected, while the remaining ones are considered to be the parent vectors of the new generation. On the other hand, according to (μ, λ) selection scheme only the offspring vectors of each generation are used to produce the new generation. This procedure is repeated until the chosen termination criterion is satisfied. The number of parents and offsprings involved affects the computational efficiency of the multi-membered ESs discussed in this work. It has been observed that values of μ and λ equal to the number of the design variables produce better results.

The ESs algorithm for structural optimization applications under seismic loading can be stated as follows:

- (1) *Selection step*: selection of $s_i (i = 1, 2, \dots, \mu)$ parent vectors of the design variables
- (2) *Analysis step*: solve $M(s_i)\ddot{u} + C(s_i)\dot{u} + K(s_i)u = R(t) (i = 1, 2, \dots, \mu)$
- (3) *Constraints check*: all parent vectors becomes feasible
- (4) *Offspring generation*: generate $s_j, (j = 1, 2, \dots, \lambda)$ offspring vectors of the design variables
- (5) *Analysis step*: solve $M(s_j)\ddot{u} + C(s_j)\dot{u} + K(s_j)u = R(t) (j = 1, 2, \dots, \lambda)$
- (6) *Constraints check*: if satisfied continue, else change s_j and go to *step 4*
- (7) *Selection step*: selection of the next generation parents according to $(\mu + \lambda)$ or (μ, λ) selection schemes
- (8) *Convergence check*: if satisfied stop, else go to *step 3*

5. Numerical Results

One benchmark test example of space frame with six storeys has been considered to illustrate the efficiency of the proposed methodology in sizing optimization problems with discrete design variables. The modulus of elasticity is 200 GPa and the yield stress is $\sigma_y = 250$ MPa. The cross section of each member is assumed to be a *I*-shape and for each member two design variables are considered as shown in Fig. 3. The objective function of the problems is the weight of the structure. The constraints are imposed on the inter-storey drifts and on the maximum non-dimensional ratio q of Eqs. (2) and (3) for each element group which combines axial force and bending moments. The values of allowable axial and bending stresses are $F_a = 150$ MPa and $F_b = 165$ MPa, respectively, whereas the maximum allowable inter-storey drift is limited to 4.5 cm which corresponds to 1.5% of the height of each storey. The test example was run on a Silicon Graphics Power Challenge computer.

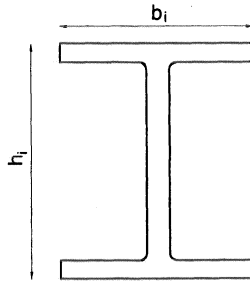


Fig. 3. *I*-shape cross section.

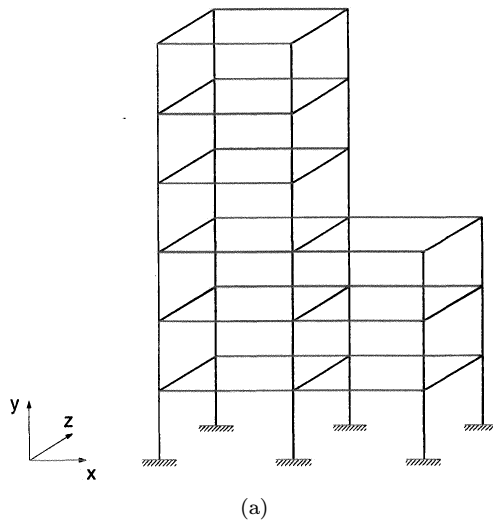
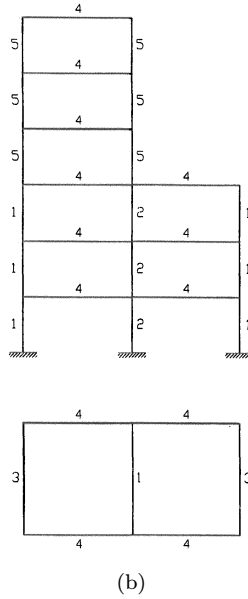


Fig. 4. (a) Six storey space frame; (b) element groups.

Fig. 4. (*Continued*)

The space frame consists of 63 elements with 180 degrees of freedom as shown in Fig. 4(a). The beams have length $L_1 = 7.32$ m and the columns $L_2 = 3.66$ m. The structure is loaded with a 19.16 kPa gravity load on all floor levels and a static lateral load of 109 kN applied at each node in the front elevation along the z direction. The element members are divided into 5 groups, as shown in Fig. 4(b), each one having two design variables resulting in ten total design variables. The constraints are imposed on the maximum allowable inter-storey drift and the non-dimensional ratio q for each element group. For this test case both $(\mu + \lambda)$ -ESs and (μ, λ) -ESs schemes are implemented.

5.1. Convergence histories

The convergence history with respect to the finite element analyses performed by the optimization procedure using the $(5 + 5)$ -ESs scheme is shown in Fig. 5 for both the direct time integration and the response spectrum modal analysis methods. It can be seen that the optimum design achieved by the direct time integration approach under the multiple loading conditions of the five artificial accelerograms given in Fig. 5 is 20% less than the corresponding design given by the response spectrum modal analysis.

5.2. Examination of $(\mu + \lambda)$ -ESs and (μ, λ) -ESs schemes

In this paragraph, the behaviour of $(\mu + \lambda)$ -ESs and (μ, λ) -ESs schemes with $\mu = \lambda = 5$ are compared. The upper values of the design parameters are taken

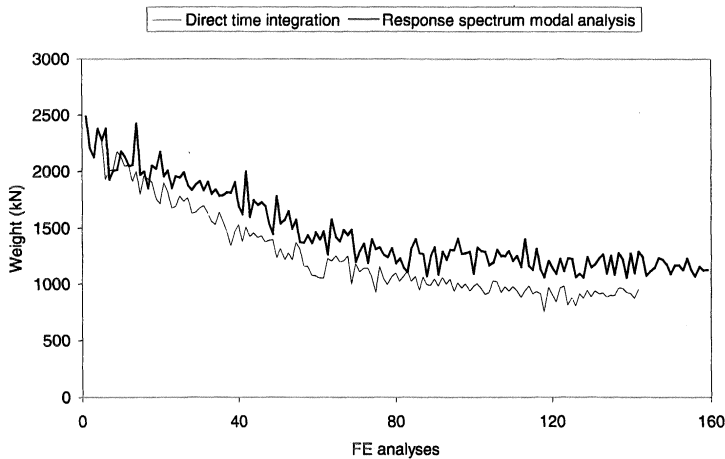


Fig. 5. Convergence histories of the optimization procedure.

as the initial design ($W_{\text{initial}} = 2486$ kN), while the termination criterion (i) is adopted for both schemes. The results obtained are shown in Table 1 for the direct integration approach and the response spectrum modal analysis. The results indicate that the $(\mu + \lambda)$ -ESs scheme appears to be more robust than the (μ, λ) -ESs scheme. Furthermore, the direct time integration approach is about two times more computationally expensive than the response spectrum modal analysis.

Table 1. Comparison of $(\mu + \lambda)$ -ESs and (μ, λ) -ESs schemes.

ESs scheme	Weight (kN)		Time (sec)		Generations		FE dynamic analyses				
$(\mu + \lambda)$	944		13 818		40		142				
(μ, λ)	842		39 657		40		359				
ESs scheme	Optimum solution achieved (design variables-cm)										
	h_1	b_1	h_2	b_2	h_3	b_3	h_4	b_4	h_5	b_5	
$(\mu + \lambda)$	46	38	58	46	51	35	20	15	46	33	
(μ, λ)	51	35	46	43	51	35	30	13	51	20	

(a) The $(\mu + \lambda)$ -ESs and (μ, λ) -ESs schemes for the direct time integration approach.

ESs scheme	Weight (kN)		Time (sec)		Generations		FE dynamic analyses				
$(\mu + \lambda)$	1126		5674		40		157				
(μ, λ)	1316		5284		21		140				
ESs scheme	Optimum solution achieved (design variables-cm)										
	h_1	b_1	h_2	b_2	h_3	b_3	h_4	b_4	h_5	b_5	
$(\mu + \lambda)$	51	41	53	53	51	41	28	20	35	33	
(μ, λ)	43	43	66	56	51	46	33	23	41	35	

(b) The $(\mu + \lambda)$ -ESs and (μ, λ) -ESs schemes for the response spectrum modal analysis.

5.3. Examination of the influence of the number of parents and offsprings

The influence of the number of parents and offsprings is considered in this paragraph. The results presented in Table 2 indicate that the schemes close to (5+5)-ESs scheme have better convergence. This confirms the empirical rule that the sum of the parents and offsprings should be roughly equal to the number of the design parameters of the problem. Schemes with larger number of parents and offsprings consume much more time until they reach convergence but they can give good results in some cases, as far as the optimum is concerned.

Table 2. Influence of the number of parent and offspring for the $(\mu + \lambda)$ -ESs schemes.

ESs scheme	Weight (kN)	Time (sec)	Generations	FE dynamic analyses
(3 + 3)	863	9839	65	135
(3 + 5)	917	11 308	35	113
(5 + 3)	963	12 816	56	123
(5 + 5)	944	13 818	40	142
(5 + 10)	835	20 574	38	248
(10 + 5)	824	29 363	78	306
(10 + 10)	844	32 130	48	381

(a) Direct time integration approach.

ESs scheme	Weight (kN)	Time (sec)	Generations	FE dynamic analyses
(3 + 3)	1207	3110	37	82
(3 + 5)	1103	3527	29	92
(5 + 3)	1082	9853	129	299
(5 + 5)	1126	5674	40	157
(5 + 10)	1165	4897	18	130
(10 + 5)	1253	4154	23	109
(10 + 10)	1108	8646	29	235

(b) Response spectrum modal analysis.

5.4. Examination of the influence of the initial design point

The behaviour of the (5 + 5)-ESs scheme for different initial designs is depicted in Table 3. The initial designs correspond to one feasible and one infeasible design. The results show that the final optimum design could be affected by the initial parameters in the range of 10% at the most.

Table 3. Influence of the starting point of the (5 + 5)-ESs scheme.

Initial design	Weight (kN)	Time (sec)	Generations	FE dynamic analyses
feasible	944	9473	35	142
infeasible	1037	13 818	40	178

(a) Direct time integration approach.

Table 3. (Continued)

Initial design	Weight (kN)	Time (sec)	Generations	FE dynamic analyses
feasible	1126	5674	40	157
infeasible	1104	9510	46	246

(b) Response spectrum modal analysis.

6. Conclusions

Evolution Strategies can be considered as a robust and efficient tool for design optimization of space frames under seismic loading. The presented results indicate the substantial improvement that can be achieved in the final design of structures under seismic loading when the proposed optimization procedure is implemented. Both design methodologies based on a number of artificially generated earthquakes and the response spectrum modal analysis adopted by the seismic codes have been implemented and compared. The more rigorous dynamic approach based on time history analyses gives more economic designs than the approximate response spectrum modal analysis, at the expense of requiring more computational effort.

References

1. M. Papadrakakis, Y. Tsompanakis, E. Hinton and J. Sienez, "Advanced solution methods in topology optimization and shape sensitivity analysis," *J. Eng. Comput.* **13**(5), pp. 57–90, 1996.
2. M. Papadrakakis, Y. Tsompanakis and N. D. Lagaros, "Structural shape optimization using evolution strategies," *Eng. Optim.* **31**, pp. 515–540, 1999.
3. J. H. Cassis, *Optimum Design of Structures Subjected to Dynamic Loads*, PhD Thesis, University of California, Los Angeles, 1974.
4. E. H. Johnson, "Disjoint design spaces in optimization of harmonically excited structures," *AIAA J.* **14**(2), pp. 259–261, 1976.
5. D. E. Goldberg, *Genetic Algorithms in Search, Optimization and Machine Learning*, Addison-Wesley Publishing Co., Inc., Reading, MA, 1989.
6. J. Holland, *Adaptation in Natural and Artificial Systems*, University of Michigan Press, Ann Arbor, 1975.
7. I. Rechenberg, *Evolution Strategy: Optimization of Technical Systems According to the Principles of Biological Evolution*, Frommann-Holzboog, Stuttgart, 1973.
8. H. P. Schwefel, *Numerical Optimization for Computer Models*, Wiley & Sons, Chichester, UK, 1981.
9. V. Thevendran, N. C. Das Gupta and G. H. Tan, "Minimum weight design of multi-bay multi-storey steel frames," *Comput. Struct.* **43**(3), pp. 495–503, 1992.
10. G. M. Barsan, "Optimal design of planar frames based on structural performance criteria," *Comput. Struct.* **3**(2), pp. 1395–1400, 1994.
11. Eurocode 3, Design of Steel Structures, Part 1.1: General Rules for Buildings, CEN, ENV 1993-1-1/1992.
12. D. A. Gasparini and E. H. Vanmarke, "Simulated earthquake motions compatible with prescribed response spectra," Massachusetts Institute of Technology (MIT), Department of Civil Engineering, Publication No. R76-4, January 1976.

13. D. A. Gasparini, SIMQKE — A Program for Artificial Motion Generation, User's Manual and Documentation, Massachusetts Institute of Technology (MIT), Department of Civil Engineering, November 1976.
14. C. A. Taylor, EQSIM, A Program for Generating Spectrum Compatible Earthquake Ground Acceleration Time Histories, Reference Manual, Bristol Earthquake Engineering Data Acquisition and Processing System, December 1989.
15. M. Schoenauer, "Shape representation for evolutionary optimization and identification in structural mechanics," *Genetic Algorithms in Engineering and Computer Science*, eds. G. Winter, J. Periaux, M. Galan, P. Cuesta and J. Wiley, pp. 443–464, 1995.
16. F. Hoffmeister and T. Back, "Genetic algorithms and evolution strategies-similarities and differences," *Parallel Problems Solving from Nature*, eds. H. P. Schwefel and R. Manner, Springer-Verlag, Berlin, Germany, pp. 455–469, 1991.
17. G. Thierauf and J. Cai, "Structural optimization based on evolution strategy," *Advanced Computational Methods in Structural Mechanics*, eds. M. Papadrakakis and G. Bageda, CIMNE, Barcelona, pp. 266–280, 1996.
18. M. Papadrakakis, N. D. Lagaros, G. Thierauf and J. Cai, "Advanced solution methods in structural optimization based on evolution strategies," *Eng. Comput. J.* **15**, pp. 12–34, 1998.
19. A. D. Belegundu and J. S. Arora, "A study of mathematical programming methods for structural optimization, Part I: Theory, Part II: Numerical results," *Int. J. Num. Meth. Eng.* **21**, pp. 1583–1623, 1985.
20. P. B. Thanedar, J. S. Arora, C. H. Tseng, O. K. Lim and G. J. Park, "Performance of some SQP methods on structural optimization problems," *Int. J. Num. Meth. Eng.* **23**, pp. 2187–2203, 1986.
21. L. S. Lasdon, A. D. Warren, A. Jain and R. Ratner, "Design and testing of a generalized reduced gradient code for nonlinear programming," *ACM Trans. Math. Software* **4**(1), pp. 34–50, 1978.
22. K. Svanberg, "The method of moving asymptotes, a new method for structural optimization," *Int. J. Num. Meth. Eng.* **23**, pp. 359–373, 1987.
23. J. Cai, *Discrete Optimization of Structures under Dynamic Loading by Using Sequential and Parallel Evolution Strategies*, PhD Thesis, Department of Civil Engineering, University of Essen, Germany, 1995.